


## Quartz Crystal


SMD-version

model	KX – 7T
frequency	40,960 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	± 20 ppm
temperature tolerance -40° ~ +85°C	± 20 ppm
load capacitance $C_L$	12 pF
series resonance R1 max.	50 Ohm
aging at +25°C (first year) max.	± 2 ppm
shunt capacitance $C_O$ max.	3,5 pF
drive level max.	100 $\mu$ W
contents of reel	1000 pcs.
part no.	12.88586


### Dimensions (mm):

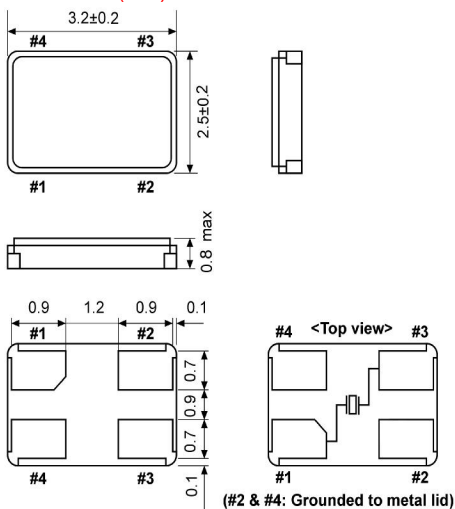

### Reflow soldering condition:

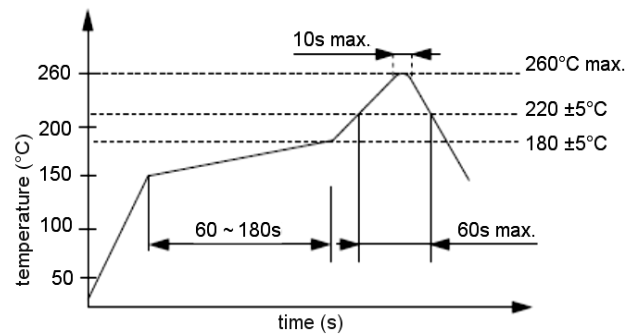

### Suggested soldering pad:



### Tape specification:

