



Ceramic Resonator Built-in capacitor types

SMD-version
KX-ZTT CV series


model	KX-ZTT-CV MT
frequency range	8,0 ~ 13,0 MHz
internal capacitance C ₁ , C ₂	22 pF
frequency tolerance at +25°C	± 0,5%
frequency stability at -20° ~ +80°C	± 0,3 %
aging for 10 years	± 0,3%
resonant resistance max.	30 Ohm
test circuit IC	1/6TC4069UBPx2
contents of reel	1000 pcs.
part no.	12.xxxxx

Please note our [Precautions for Handling](#)


Dimensions (mm):

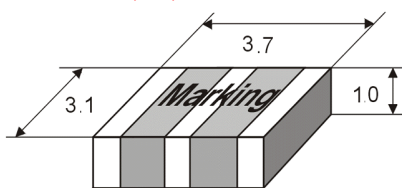


Suggested soldering pad:

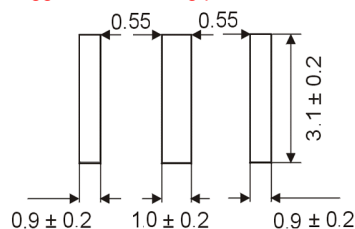

Reflow soldering condition:

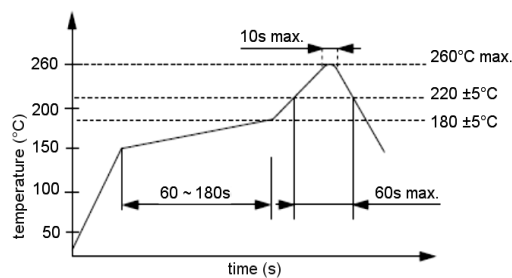

Tape specification:

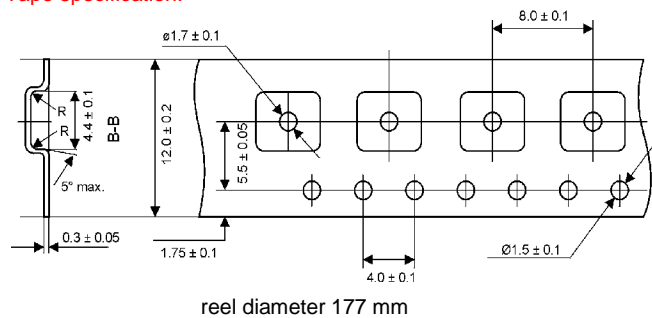

Test circuit:

