

# Ceramic Resonator



## Built-in capacitor types

SMD-version  
KX-ZTT CV series


model	KX-ZTT-CV MX	
frequency range	16,0 ~ 50,0 MHz	
internal capacitance C <sub>1</sub> , C <sub>2</sub>	16,0 MHz	22 pF
	16,01 ~ 25,99 MHz	10 pF
	26,0 ~ 50,0 MHz	5 pF
frequency tolerance at +25°C	± 0,5%	
frequency stability at -20° ~ +80°C	± 0,3 %	
aging for 10 years	± 0,3%	
resonant resistance max.	40 Ohm	
test circuit IC	1/6TC4069UBPx2	
contents of reel	1000 pcs.	
part no.	12.xxxxx	

Please note our [Precautions for Handling](#)


### Dimensions (mm):

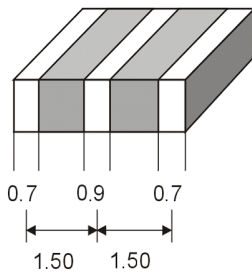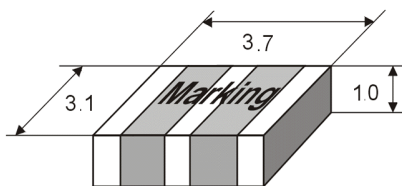


### Suggested soldering pad:

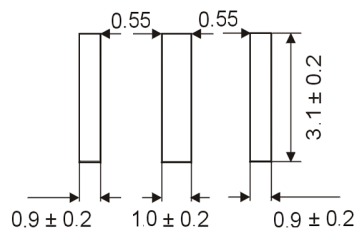

### Reflow soldering condition:

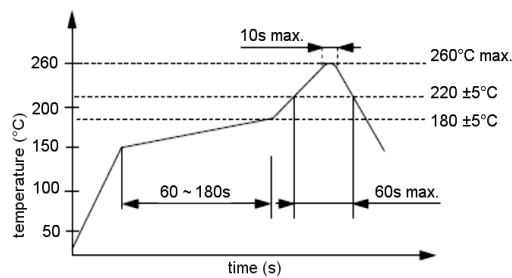

### Tape specification:

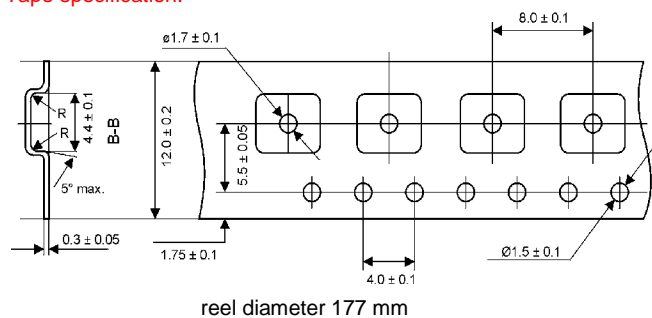

### Test circuit:

