


Quartz Crystal


SMD-version

part no.	12.86521
model	KX – 6
frequency range	27.120 MHz
mode	fundamental
operating temperature	-20° ~ + 70°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance -20° ~ + 70°C	±50 ppm
load capacitance C_L	10 pF
series resonance R_1 max.	50 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance C_0 max.	3.5 pF
drive level	50 μ W typ., 100 μ W max.
contents of reel	1000 pcs.


Dimensions (mm):

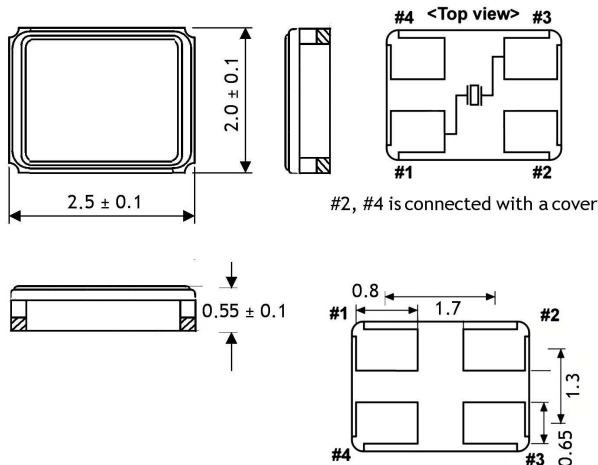


Reflow soldering condition:

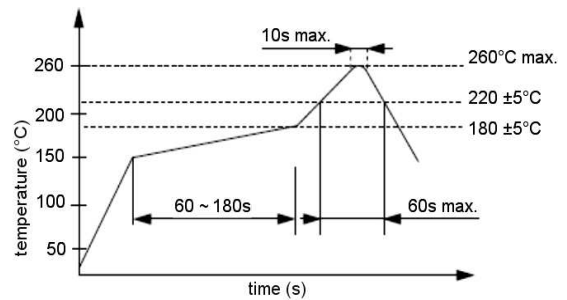

Suggested soldering pad:



Tape specification:

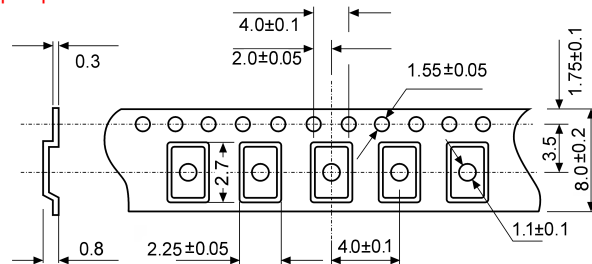

reel diameter 178 mm