




Quartz Crystal


SMD-version

model	KX - 327S
frequency	32,768 kHz
operating temperature	-20° ~ +70°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance (parabolic coefficient) at -20° ~ +70°C	-0,034 ±0,006 ppm/°C ² typ., -0,042 ppm/°C ² max.
turnover temperature	+25°C ± 5°C
load capacitance C _L	12,5 pF
series resonance R ₁ max.	50k Ohm
aging at +25°C (first year) max.	± 3 ppm
shunt capacitance C _O	0,9 pF typ.
drive level in mW max.	0,001
contents of reel	3000 pcs.
part no.	12.87110


Dimensions:

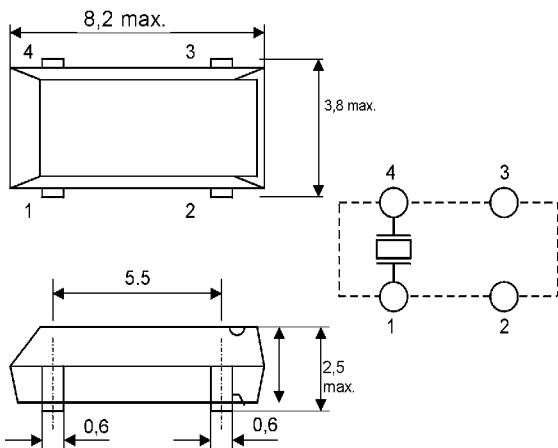

Reflow soldering condition:

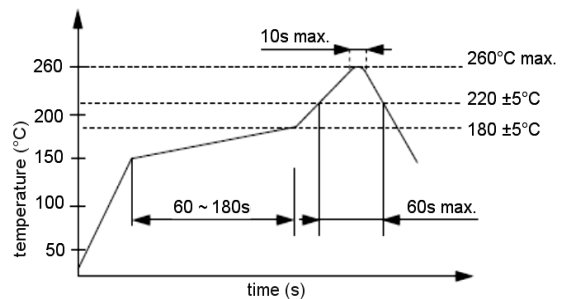

Tape specification:

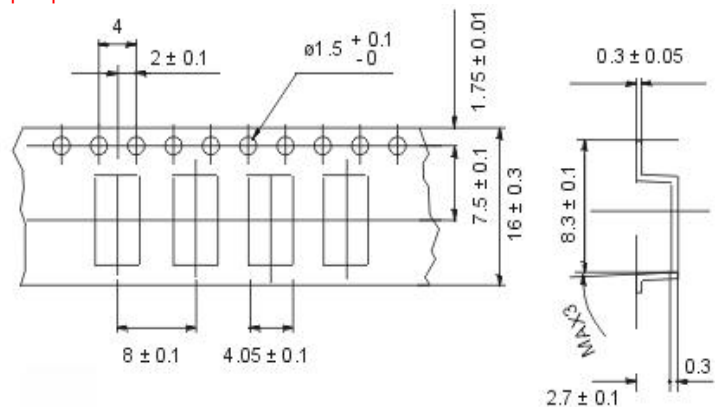

reel diameter 330 mm

Suggested soldering pad:

