




Quartz Crystal


SMD-version

| | |
|---|---|
| model | KX - 327S |
| frequency | 32,768 kHz |
| operating temperature | -20° ~ +70°C |
| frequency tolerance at +25°C | ± 20 ppm |
| temperature tolerance (parabolic coefficient) at -20° ~ +70°C | -0,034 ±0,006 ppm/°C ² typ., -0,042 ppm/°C ² max. |
| turnover temperature | +25°C ± 5°C |
| load capacitance C _L | 12,5 pF |
| series resonance R ₁ max. | 50k Ohm |
| aging at +25°C (first year) max. | ± 3 ppm |
| shunt capacitance C _O | 0,9 pF typ. |
| drive level in mW max. | 0,001 |
| contents of reel | 3000 pcs. |
| part no. | 12.87112 |


Dimensions:

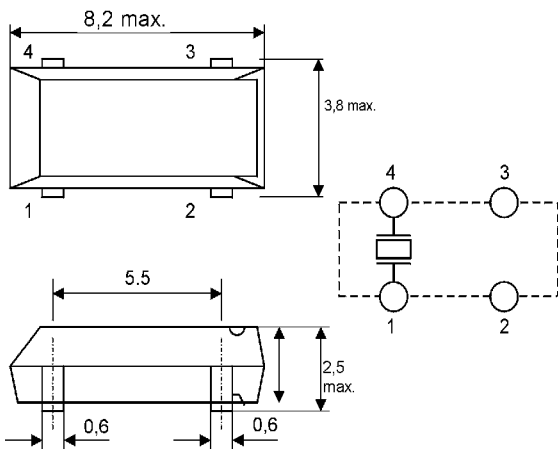

Reflow soldering condition:

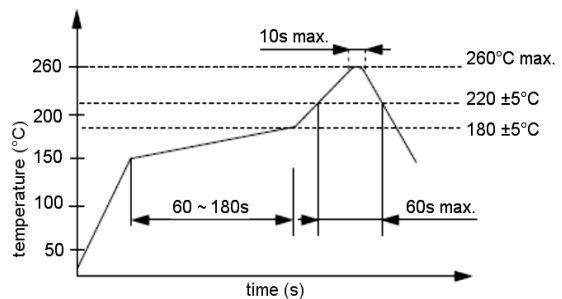

Tape specification:

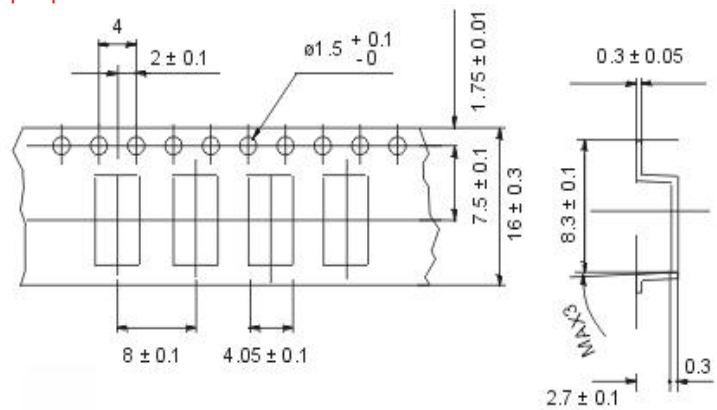

reel diameter 330 mm

Suggested soldering pad:

