




## Quartz Crystal


SMD-version

model	KX - 327S
frequency	32,768 kHz
operating temperature	-20° ~ +70°C
frequency tolerance at +25°C	± 5 ppm
temperature tolerance (parabolic coefficient) at -20° ~ +70°C	-0,034 ±0,006 ppm/°C <sup>2</sup> typ., -0,042 ppm/°C <sup>2</sup> max.
turnover temperature	+25°C ± 5°C
load capacitance C <sub>L</sub>	12,5 pF
series resonance R <sub>1</sub> max.	50k Ohm
aging at +25°C (first year) max.	± 3 ppm
shunt capacitance C <sub>O</sub>	0,9 pF typ.
drive level in mW max.	0,001
contents of reel	3000 pcs.
part no.	12.87113


### Dimensions:

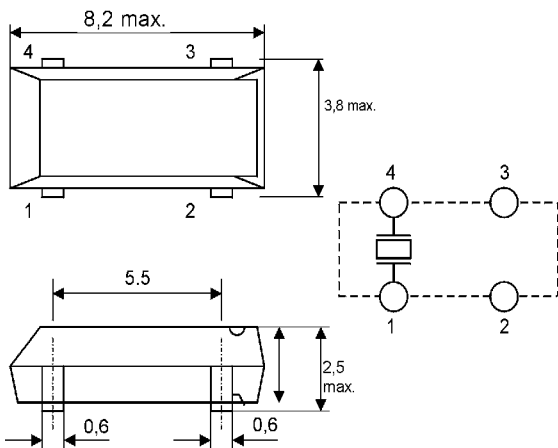

### Reflow soldering condition:

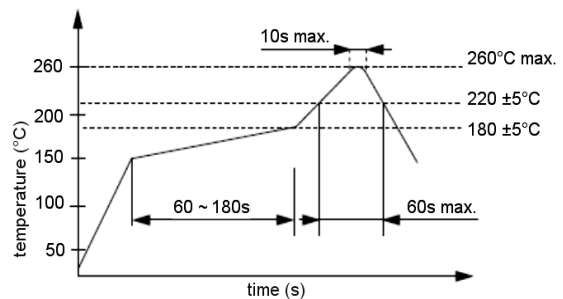

### Tape specification:

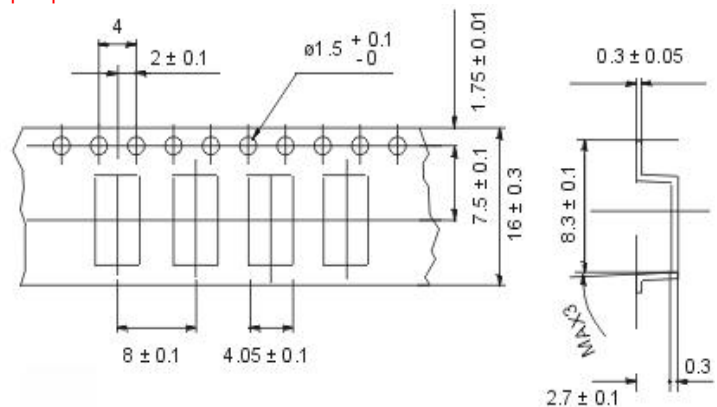

reel diameter 330 mm

### Suggested soldering pad:

