




Quartz Crystal


SMD-version

| | |
|-------------------------------------|--------------|
| model | KX - 7 |
| frequency | 12,0 MHz |
| mode | fundamental |
| operating temperature | -20° ~ +70°C |
| frequency tolerance at +25°C | ± 30 ppm |
| temperature tolerance -20° ~ + 70°C | ± 50 ppm |
| load capacitance C_L | 12 pF |
| series resonance R1 max. | 50 Ohm |
| aging at 25°C (first year) max | ± 2 ppm |
| shunt capacitance C_O max. | 3,5 pF |
| drive level max. | 0,05 mW |
| contents of reel | 1000 pcs. |
| part no. | 12.88662 |


Dimensions (mm):

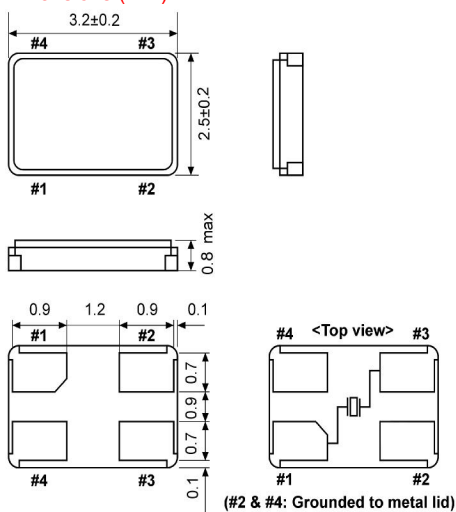

Reflow soldering condition:

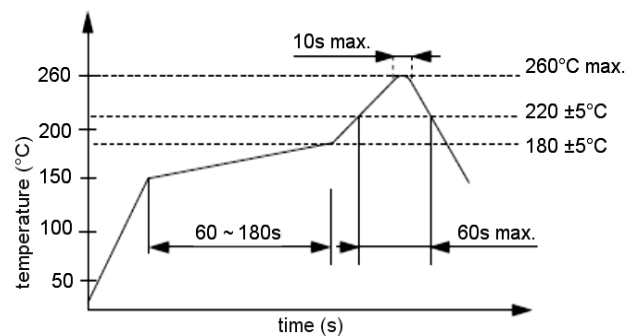

Suggested soldering pad:



Tape specification:

