




# Quartz Crystal


SMD-version

model	KX - 7
frequency	30,0 MHz
mode	fundamental
operating temperature	-0° ~ +70°C
frequency tolerance at +25°C	± 20 ppm
temperature tolerance 0° ~ +70°C	± 20 ppm
load capacitance $C_L$	10 pF
series resonance R1 max.	50 Ohm
aging at 25°C (first year) max.	+/-15ppm max. over 12 years
shunt capacitance $C_0$ max.	2 pF
drive level max.	0,05 mW
contents of reel	1000 pcs.
part no.	12.88760


**Dimensions (mm):**

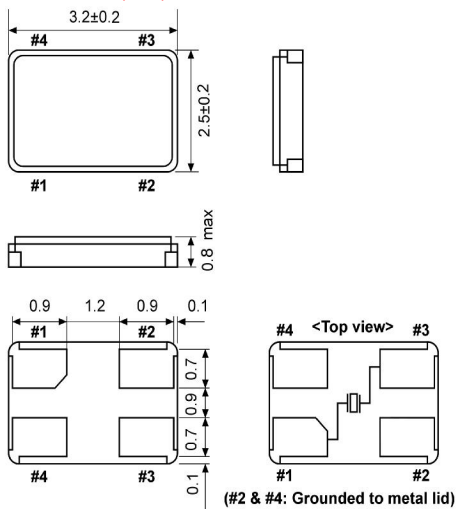

**Reflow soldering condition:**

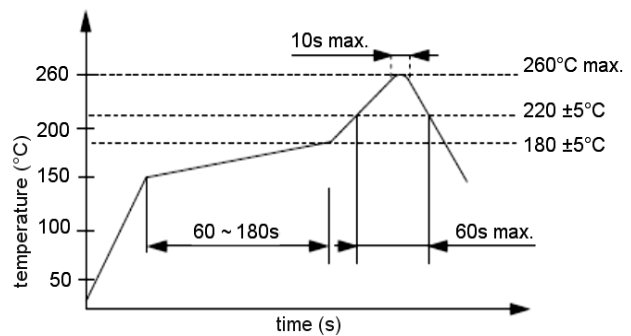

**Suggested soldering pad:**



**Tape specification:**

